
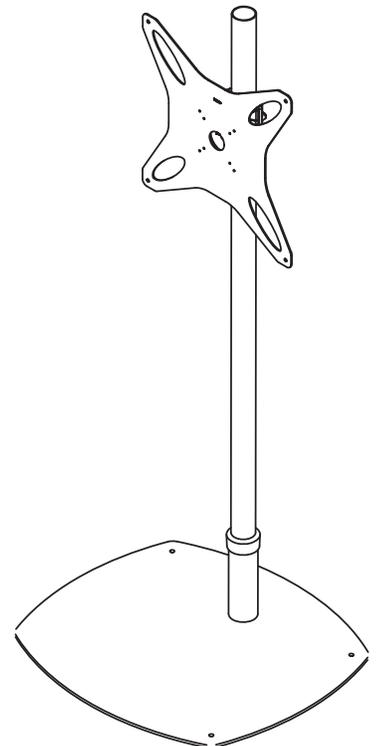
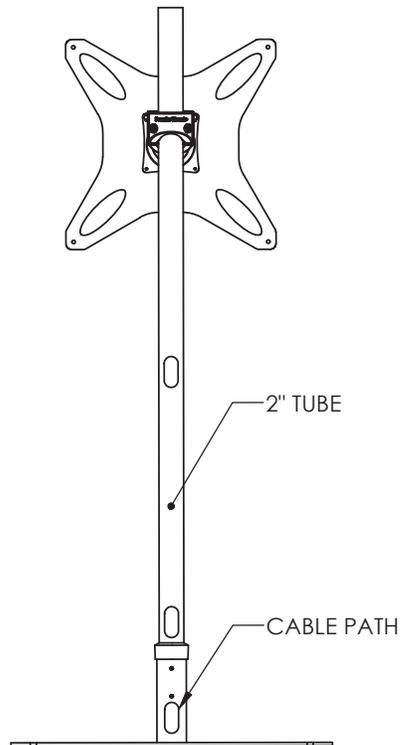
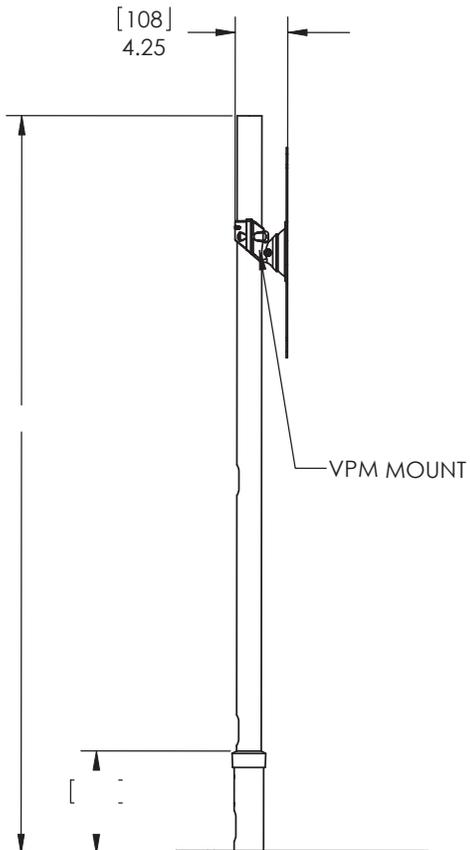
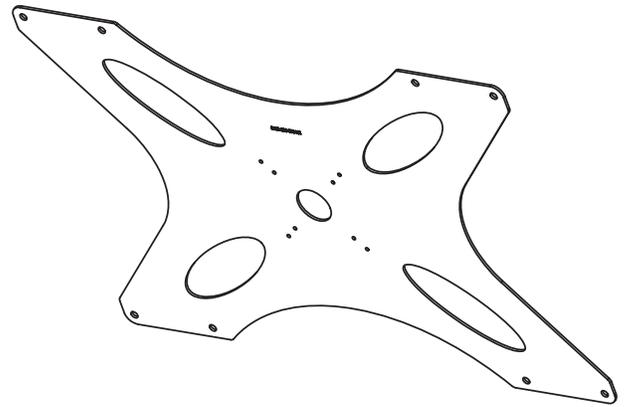
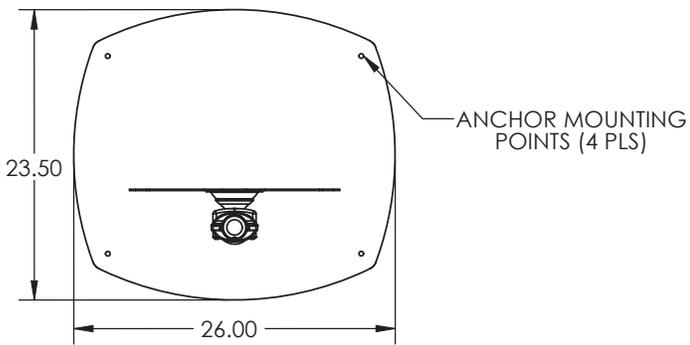


BrightShow Promoter Stand


GDSPSP-S60B

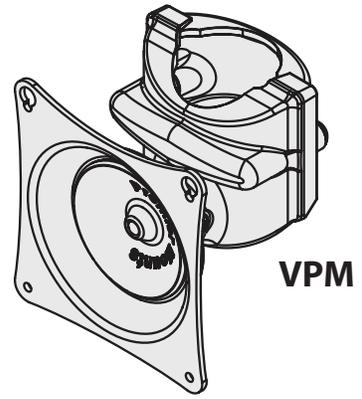

FLOOR PLATE ASSEMBLY

1 Unpack plate and set on flat surface.

2 Install 2" tube through column and secure with (2) M8 x 10 Socket head set screws

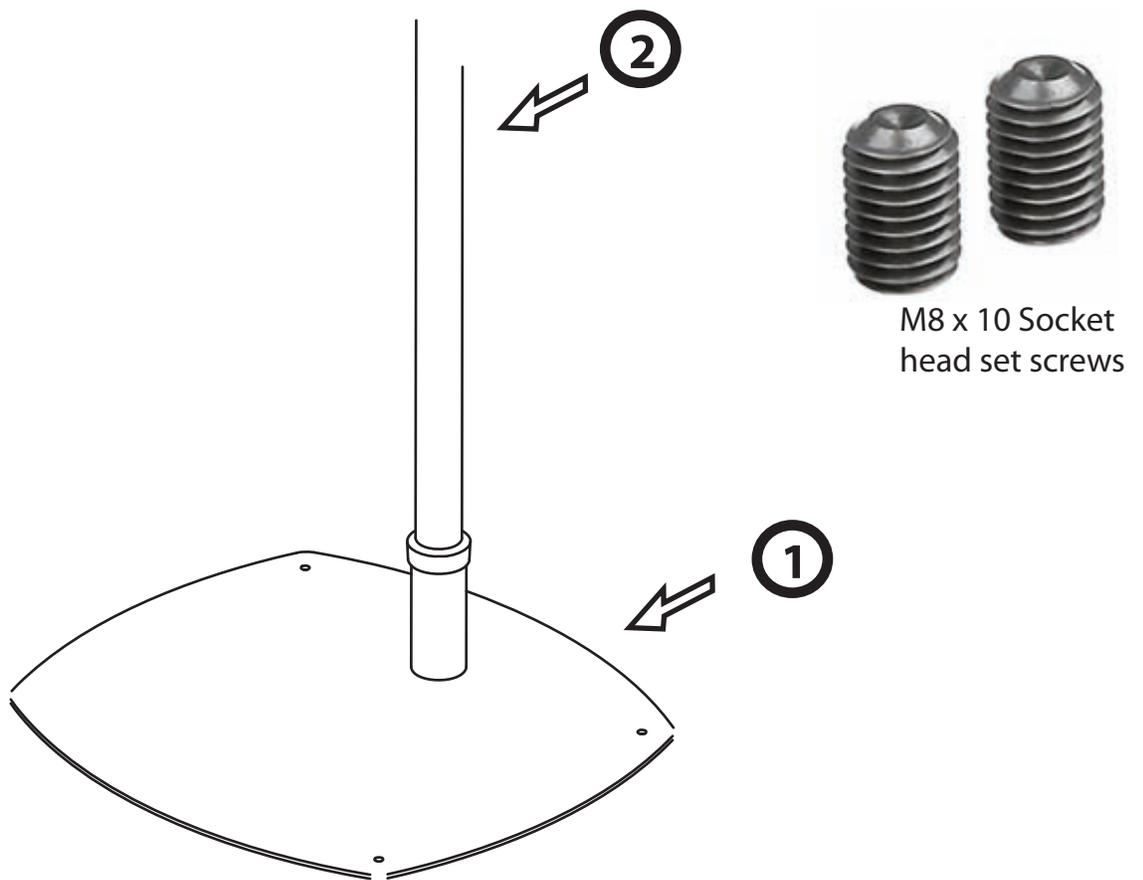

1 Installing the Adapter Plate

 the attachment head of the VPM. The adapter plate has a 400mm x 400mm or 200mm x 400mm VESA pattern, but that is only for attaching the plate to the BrightShow display screen. The attachment to the VPM is done first.

Attach the Adapter Plate to the back of the flat panel using the appropriate mounting hardware.

 Figure 1 shows a flat-panel using the 400mm x 400mm pattern.


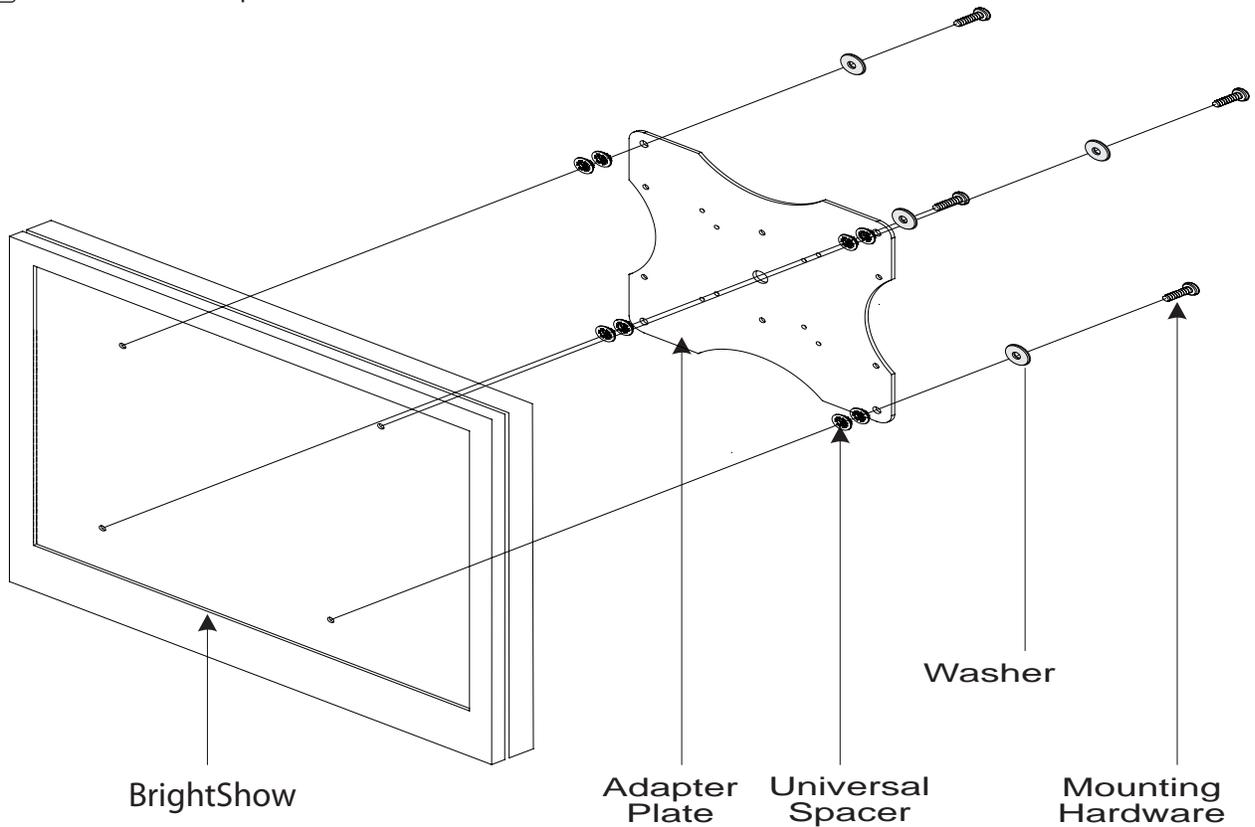


Figure 1

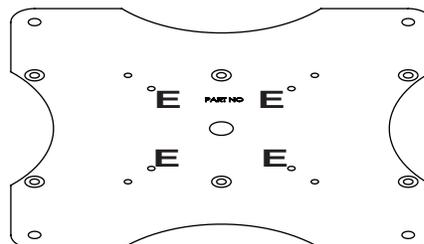

E indicates the VPM attachment holes

Figure 2

Preparing the VPM

Remove the M8 x 40mm hex screws from the sides of the VPM to open the collar clasp and begin installation.

Proceed to the “Installing the Fixed Tilt Adapters (Optional)” section.

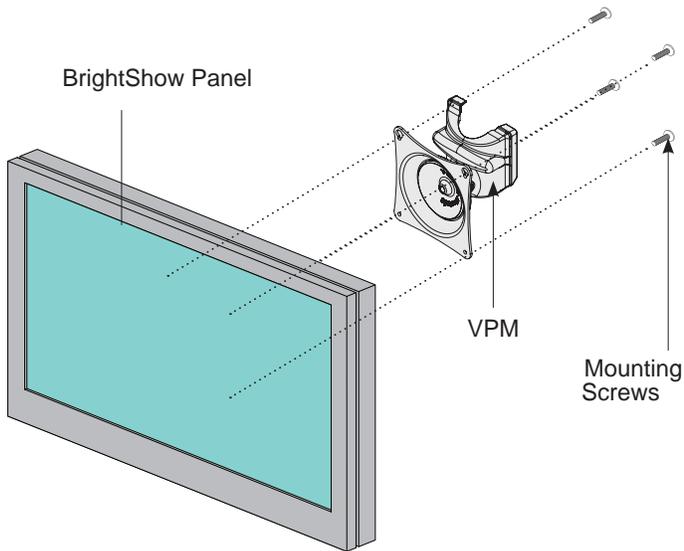
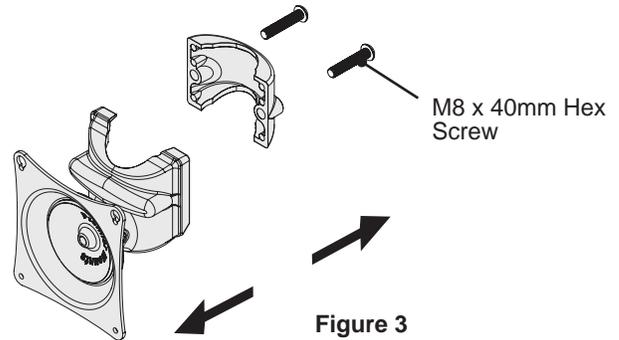


Figure 4

Re-insert the M8 x 40mm hex screws or insert M8 x 40mm security screws into the two halves of the VPM to clasp them around the pole at the desired position (Figure 1).

 At least two qualified people are needed to attach the flat-panel and VPM to a pole.

 Do not overtighten the mounting hardware.

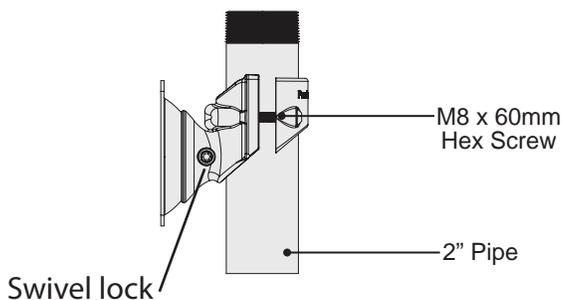


Figure 6

Attach the VPM head as shown in figure 4 to the adapter plate on rear of display.

