

# BrightShow OUTSIDE

Bright Views

Engage Outdoors

Weather/Element Tested

- Available in 22" – 85" Sizes
- 2500 nits brightness
- NEMA IP 65 Rated



Vandal Proof



Advanced Temperature Control System



Anti-Reflective Glass




Ambient Light Sensor



Landscape or Portrait

Touch  
Option  
Available

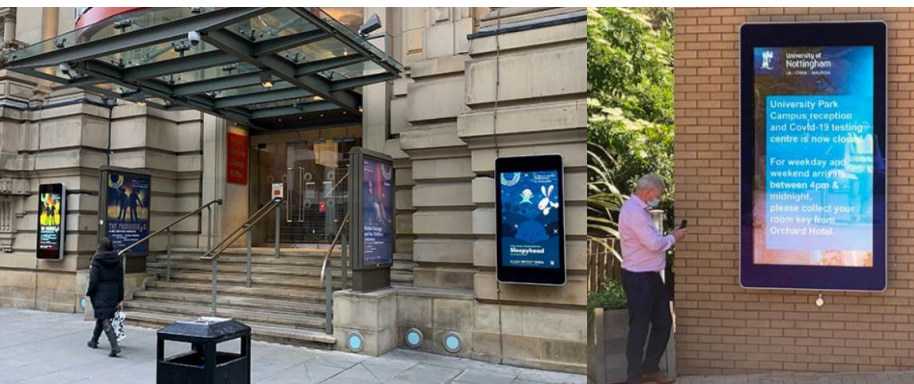


Digital Signage for the Great Outdoors.

Standard mounting  
system included

**GALLERY**  
Digital Signage Solutions

**DSGDSOD**

[www.gallerydigitalsignage.com](http://www.gallerydigitalsignage.com)

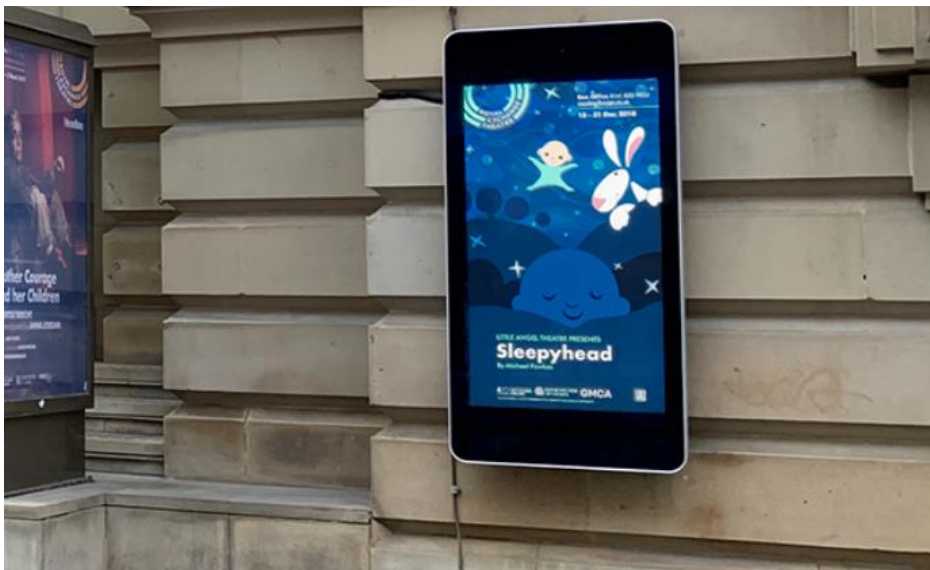

OUTDOOR



2,500 CD/M<sup>2</sup>  
SUNLIGHT READABLE



IP65 RATED




IK10 RATED

## Specifications

Display	22,32,43,49",55",65",75",85" IPS Display
Resolution	1920 x 1080 Resolution
Viewable	178° Angle Viewable each side
Brightness	2500 cd/m <sup>2</sup>
Rating	Operating Hours 70,000
Power	AC110~240V (50Hz~60Hz)
Speakers	Built in 2W, 4Ω (x2)
Dimensions	Vary based on screen size
Operating Temp	-4° F - 122° F
Aviation Ports	USB / HDMI / VGA
Network	Wifi 802.11b/g/n Lan 10/100



PCAP Touch Optional 

**System includes:** Display Mounting, Remote Control, Key, User Manual



[www.gallerydigitalsignage.com](http://www.gallerydigitalsignage.com)