



BrightShow™ 42" Mounting

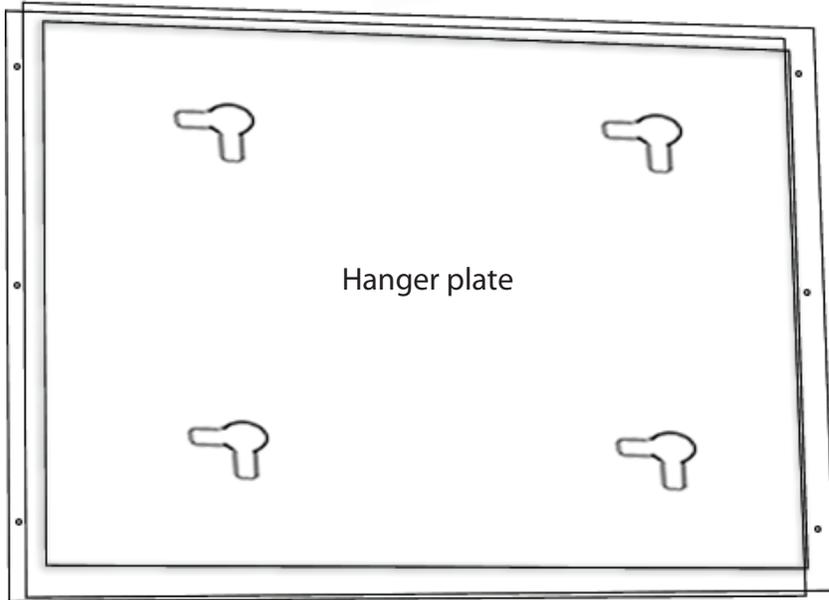



Mount wall plate as shown with proper anchors along left and right ridge of plate. (Minimum 3 per side)

Electrical outlet should be recessed and placed horizontally above plate location to allow power plug insertion to be concealed behind screen.

Insert hex bolt into extruded sleeve





Insert 4 bolts provided with screen into rear VESA points. Leave enough spacing to slide into key on hanger plate.

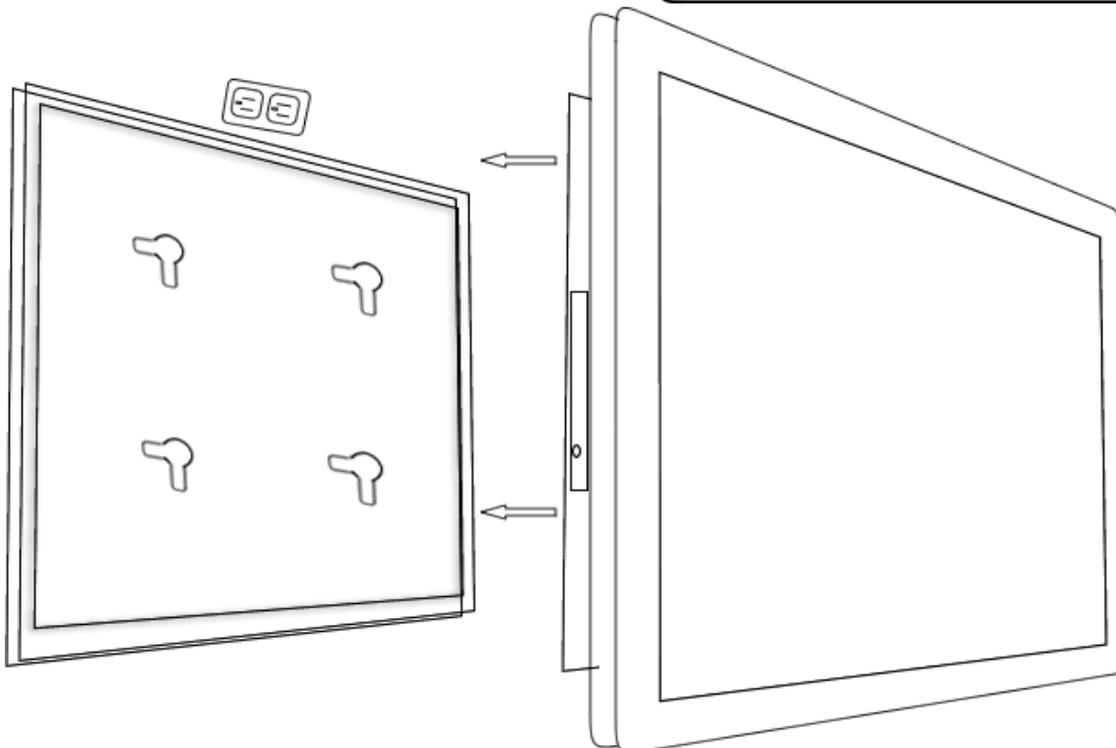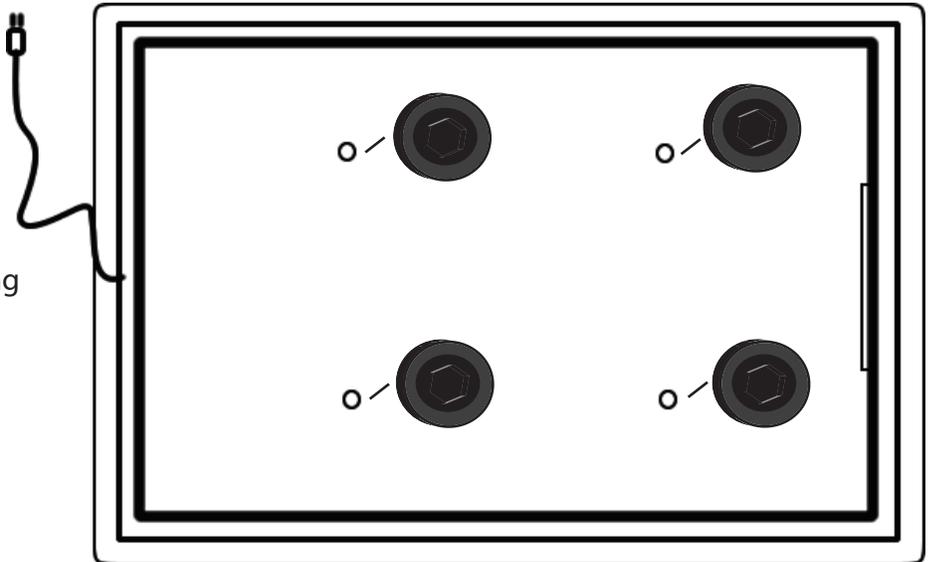

Hang screen into plate and lock down into keyed slots.



Insert USB cable (A-B M/M) provided into side of screen in either USB A jack.

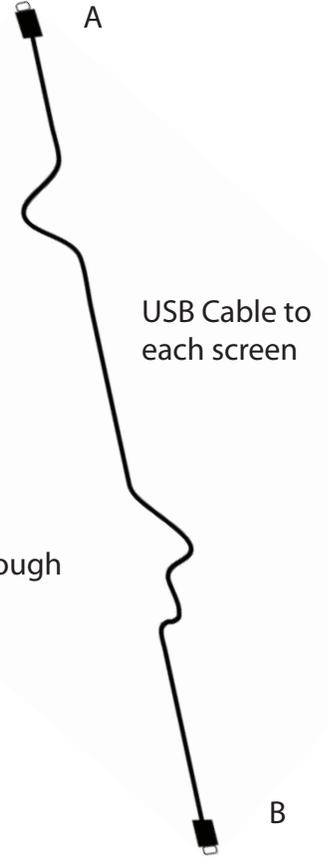

Install access plate cover over jack ports and secure with provided Torx screws using provided tool. Make sure USB cable is ported through hole on panel plate.



Install raceway cover PVC over USB cable coming from screen. Secure raceway inconspicuously (as hidden as possible) to about 4 feet from floor and install & connect PVC junction box. Install USB A/B insert keystone for each USB lead. (USB B connection inside to USB A on front outside)

